



replacing  
gass bottle

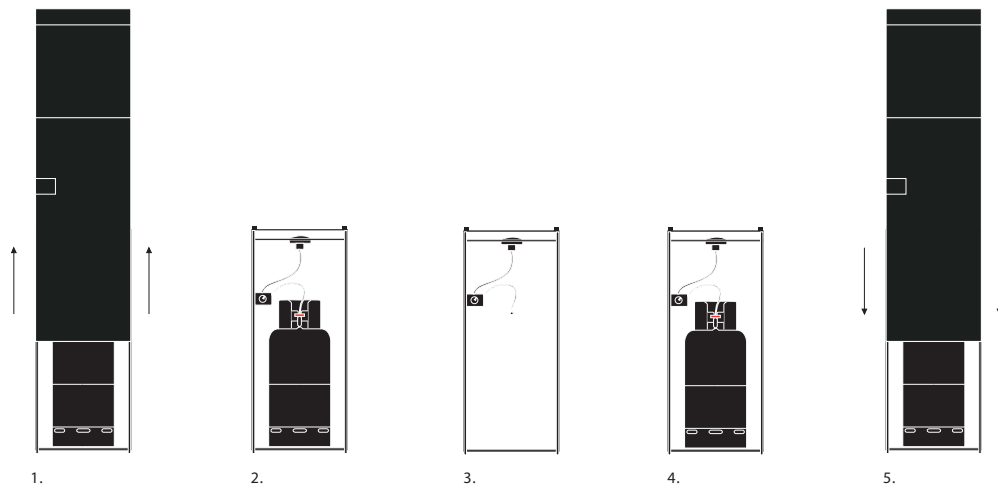


1. to remove the gas bottle,  
first remove the cover by lifting it up
2. turn the ....? to disconnect the hose from the gas bottle
3. replace the gas bottle
4. connect the hose to the gas bottle by turning the ...?  
before use, open the gas bottle to turn the...?
5. put the cover back on the inside system


ignition  
flame




to ignite the flame,  
push the knob in  
turn anti-clockwise to PILOT  
hold position for a few seconds  
when using the gas bottle for the first time,  
hold position for approx. 1 minute




continue turning anti-clockwise to SPARK position  
ensure that the spark has lit  
If not, repeat from beginning  
when the spark has lit,  
keep knob pressed for approx. 10 seconds  
release the knob



to control the height of the flame  
turn the knob anti-clockwise to the height you wish



when you turn the knob completely anti-clockwise,  
you achieve the highest position of the flame



to turn the flame off  
press the knob in  
turn the knob clockwise to the OFF position  
release the knob

### CONTACT

JSPR  
T +31 (0) 497336939  
F +31 (0) 847516979  
INFO@STUDIOJSPR.NL  
WWW.STUDIOJSPR.NL