


SPECIFICATIONS

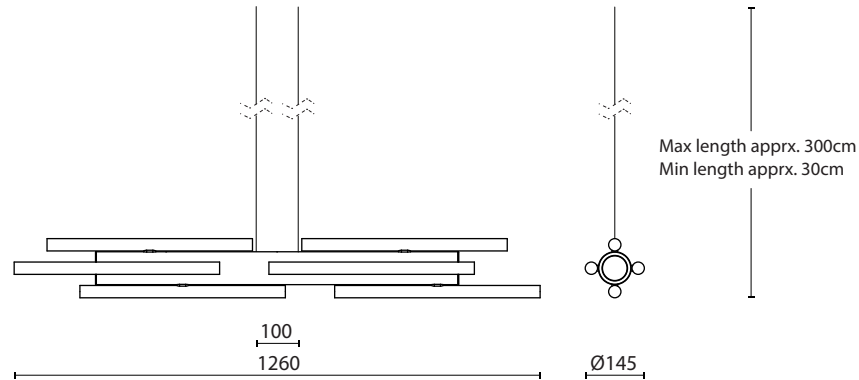

ISO SMALL

suspended light fixture

Collection

Iso

Dimensions

Length: 1260 mm
 Diameter: 145 mm

Weight

2,5kg / 5,5lb

Usage

indoor

Materials

Anodized aluminium
 8x glass LED bulbs

Suspension

Delivered with 3 meter long
 stainless steel suspension cable
 set.

custom lengths upon request.

Canopy

Delivered with 2x ceiling
 fasteners.

Canopy sold separately.
 See price list.

Certification

Europe:



USA & Canada:

low voltage in combination with
 UL driver



Lighting

Europe (240V)

light source: LED bulb dimmable

wattage: 35,2W

lumens: 2800lm (est.)

color temp. 2700k

USA & Canada (120V)

light source: LED bulb dimmable

wattage: 35,2W

lumens: 2800lm (est.)

color temp. 2700k

Dimming*

0 - 10V, DALI, conventional / phase cut

*specify dimming system, available for
 purchase


Remarks

Requires assembly.

Canopies & other

accessories see price list.

SPECIFICATIONS

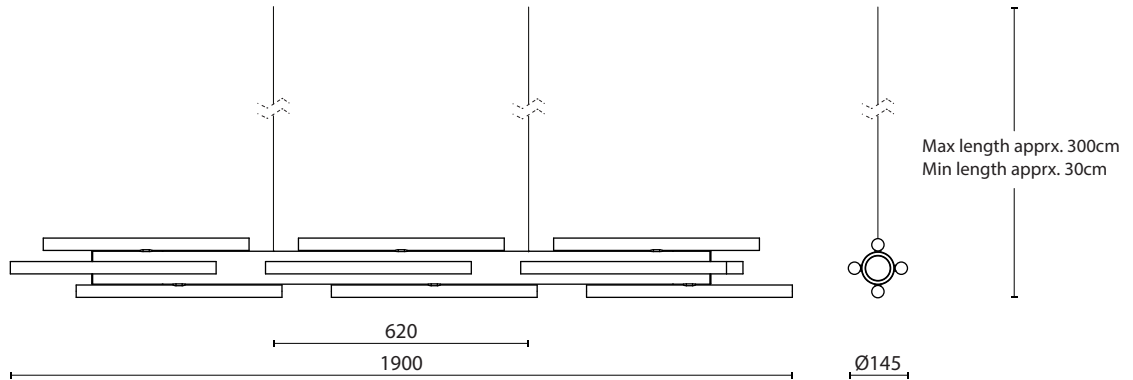

ISO MEDIUM

suspended light fixture

Collection

Iso

Materials

Anodized aluminium
 12x glass LED bulbs

Lighting

Europe (240V)
 light source: LED bulb dimmable
 wattage: 52,8W
 lumens: 4200lm (est.)
 color temp. 2700k

Dimensions

Length: 1900 mm
 Diameter: 145 mm

Suspension

Delivered with 3 meter long
 stainless steel suspension cable
 set.

USA & Canada (120V)

light source: LED bulb dimmable
 wattage: 52,8W
 lumens: 4200lm (est.)
 color temp. 2700k

Weight

4,5kg / 10lb

custom lengths upon request.

Usage

indoor

Canopy

Delivered with 2x ceiling
 fasteners.

Dimming*

0 - 10V, DALI, conventional / phase cut

Canopy sold separately.
 See price list.

*specify dimming system, available for
 purchase

Certification

Europe:



USA & Canada:


low voltage in combination with
 UL driver



Remarks

Requires assembly.
 Canopies & other
 accessories see price list.

SPECIFICATIONS

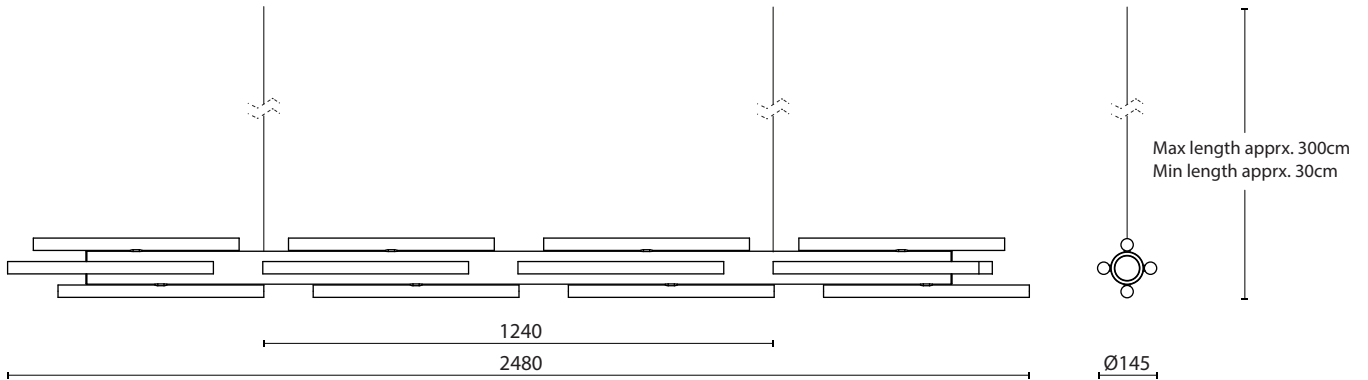

ISO LARGE

suspended light fixture

Collection

Iso

Dimensions

Length: 2480 mm
 Diameter: 145 mm

Weight

6kg / 13lb

Usage

indoor

Materials

Anodized aluminium
 16x glass LED bulbs

Suspension

Delivered with 3 meter long
 stainless steel suspension cable
 set.

custom lengths upon request.

Canopy

Delivered with 2x ceiling
 fasteners.

Canopy sold separately.
 See price list.

Certification

Europe:



USA & Canada:

low voltage in combination with
 UL driver



Lighting

Europe (240V)

light source: LED bulb dimmable
 wattage: 70.4W
 lumens: 5600lm (est.)
 color temp. 2700k

USA & Canada (120V)

light source: LED bulb dimmable
 wattage: 70,4W
 lumens: 5600lm (est.)
 color temp. 2700k

Dimming*


0 - 10V, DALI, conventional / phase cut

*specify dimming system, available for
 purchase

Remarks

Requires assembly.
 Canopies & other
 accessories see price list.

SPECIFICATIONS

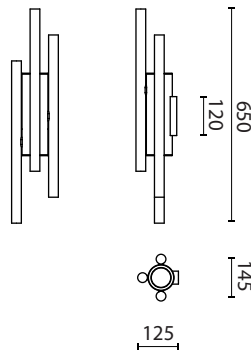

ISO Wall Light SMALL

suspended light fixture

Collection

Iso

Materials

Anodized aluminium
 3x glass LED bulbs

Lighting

Europe (240V)
 light source: LED bulb dimmable
 wattage: 13,2W
 lumens: 1050lm (est.)
 color temp. 2700k

Dimensions

Height: 650 mm
 Width: 145 mm
 Depth: 125 mm

Wall mount

Delivered with matching wall mount.

USA & Canada (120V)

light source: LED bulb dimmable
 wattage: 13,2W
 lumens: 1050lm (est.)
 color temp. 2700k

Weight

1,5kg / 3,3lb

Certification

Europe:
 CE

USA & Canada:
 low voltage in combination with
 UL driver



Dimming*

0 - 10V, DALI, conventional / phase cut

*specify dimming system, available for purchase


Usage

indoor

Remarks

Requires assembly.
 Wall mount included.

SPECIFICATIONS

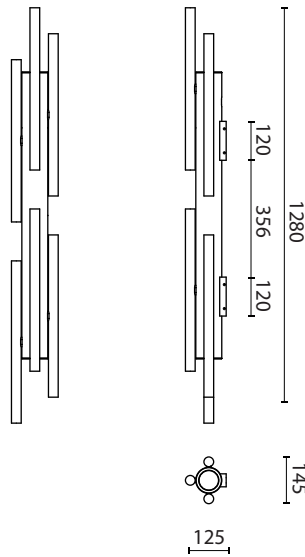

ISO Wall Light MEDIUM

suspended light fixture

Collection

Iso

Materials

Anodized aluminium
 6x glass LED bulbs

Lighting

Europe (240V)
 light source: LED bulb dimmable
 wattage: 26,4W
 lumens: 2100lm (est.)
 color temp. 2700k

Dimensions

Height: 1280 mm
 Width: 145 mm
 Depth: 125 mm

Wall mount

Delivered with matching wall mounts.

USA & Canada (120V)

light source: LED bulb dimmable
 wattage: 26,4W
 lumens: 2100lm (est.)
 color temp. 2700k

Weight

3kg / 6,6lb

Certification

Europe:
 CE

USA & Canada:
 low voltage in combination with
 UL driver



Dimming*

0 - 10V, DALI, conventional / phase cut

*specify dimming system, available for purchase

Usage

indoor

Remarks

Requires assembly.
 Wall mounts included.